

Posted: 7 hours ago

[◀ prev](#) [▲](#) [next ▶](#)**Rubber Stepping Stones (Westminster)**

condition: new




Recycled Rubber Stepping Stones. 12" hexagons

I have about 1,200 rubber stepping stones for sale. They typically retail at \$4.00 each and I am trying to get rid of them at \$0.50/each. These are brick red in color and have never been used. Make an offer for the entire amount.

Ken - 720-232-7252

- do NOT contact me with unsolicited services or offers

DSC Hexagonal Rubber Paver

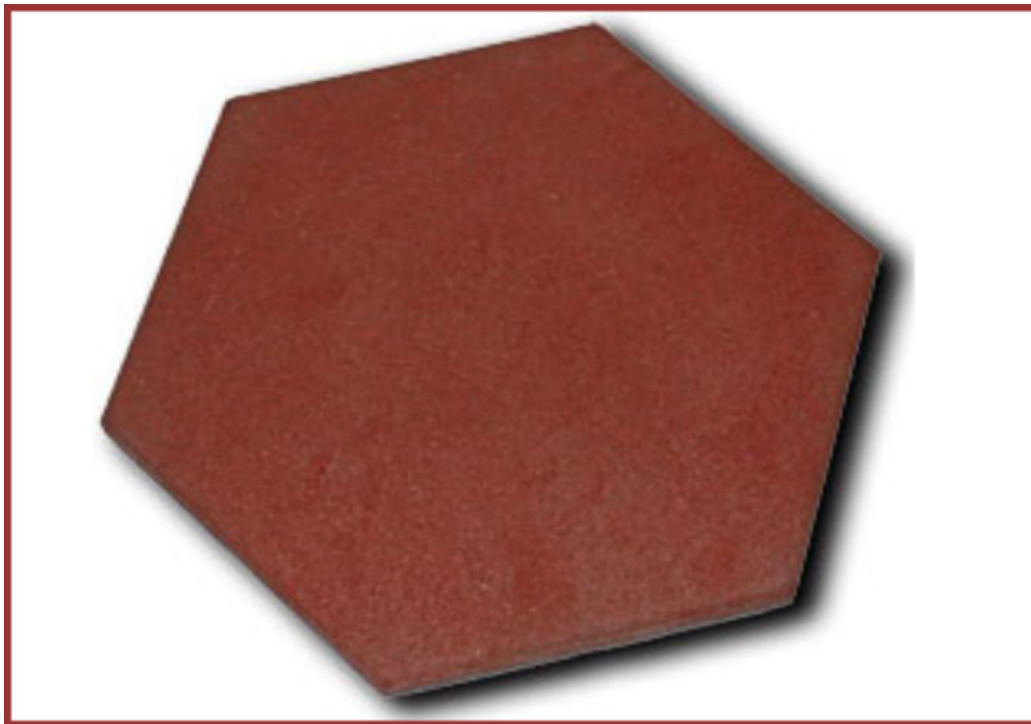

Request Information
Free Price Quote

DSC 1" Hexagonal Rubber Paver

The one inch thick DSC Hexagonal Rubber Paver is imported from Asia and made from recycled tire rubber.

This is a close-out product that is available in limited quantities at an unbeatable price.

The DSC Hexagonal Rubber paver is available in Terra Cotta Red only. Each paver covers about one square foot.



This hexagonal paver tile is an excellent choice for resurfacing applications over hard surfaces such as concrete, asphalt or wood.

The DSC Hexagonal Rubber Paver must be installed with adhesive. It can be glued to any hard surface such as concrete, asphalt or wood.

This product can be used in any climate zone in all types of weather conditions. As is the case with most Asian rubber tile imports, this product has a bit of a rubber odor which makes it less than ideal for use indoors or in confined spaces.

Links and Downloads

[Color Options](#)

[Downloads](#)

[Installation](#)

Sofscape Safety Surfacing

*"Providing Safety and
Durability while Conserving
the Environment"*



s o f s c a p e

Limited Warranty

Sofscape safety surfacing is guaranteed by the Manufacturer to be free from defects in material and workmanship for a period of (5) years from the date of installation. The manufacturer reserves the right to change the design, material or specifications to improve product properties and/or processing at any time without notice. Sofscape safety surfacing warranty does not cover discontent due to improper installation, normal abrasion from pedestrian traffic, color variations and white speckles from the recycled rubber.



ADA Compliant



Made from
100% Recycled Rubber

SOFSCAPE CARIBE, INC.

Caribbean Operations
Sofscape Caribe Inc.
P.O. Box 1687
Vega Baja, P.R. 00694
Tel. 787-807-0010
Fax. 787-807-0013
email: sofscape@caribe.net

Florida Office
P.O. Box 476
Port Richey, FL 34673
Tel. 727-858-5438
Fax. 787-807-0013
email: sofscapeusa@caribe.net

Pennsylvania Office
Sofscape NE
1281 Hammon Ave.
Ephrata, PA 17522
Tel. 717-435-5415
Fax. 413-410-2275
email: sofscape@gmail.com

s o f s c a p e

www.sofscapecaribe.com

Certified Minority Business Enterprise (MBE)

Your child's safety is our concern

At **Sofscape** we provide a flooring option with safety and comfort attributes. Our rubber pavers are suitable for indoor and outdoor applications where impact attenuation, safety, and proper access are needed and/or are required.

Current Playgrounds Safety Surfacing Needs & Concerns:

Safety

1. Each year, 200,000 children receive medical attention due to playground injuries.⁽¹⁾
2. 79% of all accidents occur from playground related fall.⁽¹⁾
3. 45% of playground related injuries are severe.⁽¹⁾
4. The impact attenuation properties of loose materials varies depending on maintenance creating a safety hazard.

Health

1. Sand, stones, and mulch can hide dangerous objects such as syringes and broken glass.
2. Swallowing and choking are a very serious health hazard with certain surfacing alternatives.
3. Wood chips or mulch can promote the growth of fungus that can cause breathing problems.
4. Other rubber flooring options made in third world countries may contain toxic pigments or chemicals.

Regulations

1. Some of the flooring alternatives do not permit proper access to individuals with physical challenges. Children with many type of disabilities may feel left out due to improper flooring access to playgrounds and recreational areas.⁽²⁾

Cost

1. Other rubber flooring options do not offer a proper product warranty.
2. Many safety flooring alternative require a complete concrete sub-base that increases the installation cost.

Reference - (1) Office of Technology Assessment U.S. Congress, Risk to Students (1995). (2) Americans with Disabilities Act

Sofscape Safety Surfacing is one of the leading alternatives in the market today.

SOFSCAPE FEATURES

Certified for use in playground areas according to ASTM F-1232-04 Standard Specification for Impact Attenuation of Surface Systems.*

Sofscape Safety Surfacing complies with the Consumer Product Safety Commission (C.P.S.C.) guidelines.

It meets the testing requirements of the Americans with Disabilities Act (A.D.A.) under the testing requirements of ASTM F-1951-04.

Sofscape Safety Surfacing is warranted for 5 years from the date of installation.

Low installation cost. It can be installed over a variety of surfaces such as asphalt, concrete, and compacted aggregate.

If repairs are needed, only replace the individual pavers affected and not a complete roll or surface.

Excellent permeable surface.

Even surface - no loose material.

Maximum comfort and traction.

Environmentally friendly.

Latex Free.

Available in Black, Green, Gray and Red.

BENEFITS

Fall Protection- Parents can relax and enjoy while watching their children play in a safe environment.

Complete accessibility for mobility impaired and physically challenged individuals. Makes children feel welcome regardless of their personal challenges.

Long lasting rubber surface. Your investment is guaranteed to last for many years to come. Will not warp or curl.

Low installation cost, better economic value since other rubber options can only be installed over a concrete sub-base.

No need to replace the whole surface due to damage.

Water drains easily, can play right after the rain. Eliminates water puddles.

Eliminates the possibility of swallowing of loose material.

Reduces physical stress when walking.

Promotes recycling.

Non-Alergic material.

Allows the possibility of multicolor designs. (EPDM colors available)

PROTECTIVE SURFACING ALTERNATIVES - COMPARISON CHART

Product Characteristics	Sofscape Safety Surfacing	Fill Stone	Loose Mulch	Sand
ADA compliant accessibility for physically challenged individuals.	Yes	No	No	No
Consumer Product Safety Commission (CPSC) approved.	Yes	Sometimes	Sometimes	Sometimes
Swallowing & Choking Hazard	No	Yes	Yes	Yes
Eliminates Dirt & Mud	Yes	No	No	No
Impact Attenuation under different environments conditions.	Yes	No	No	No
Over Product - 100% (SBR) recycled auto tire rubber	Yes	No	No	No
Low Maintenance	Yes	No	No	No
The Litter Box effect, cats and dogs use loose material surfaces for their bathroom activities.	No	Yes	Yes	Yes
Removes the hazard of hidden dangerous objects	Yes	No	No	No


Thickness

Constant thickness of 2 inches.



Eco-Friendly

Made from clean SBR recycled rubber. Non-toxic and latex free.



Exclusive Drainage Design Non-toxic and latex free

Water drains easily. Can play right after the rain.



Porous Texture

Excellent traction.

Urethane Pigmented

EPDM top available



Ideal for:

Day Care Centers
Playground areas

Schools and Universities

Public recreational areas
Walking trails, playground areas

Home decor
Landscaping trails, pool surroundings, basement floors, patio decks, roof top decks, deck ramps

ADA Baseball Fields

Six Resorts
Cafeteria entrance, walkways to dressing room entrance, walking trails, decks



Technical Specifications for Sofscape Rubber Pavers

- 1. Product Name:** Sofscape Pavers
- 2. Manufacturer:** Sofscape Caribe Inc.
P.O. Box 1687
Vega Baja, P.R. 00694
Phone: 787-807-0010
Fax: 787-807-0013
Email: sofscape@caribe.net
Internet Website: www.sofscapecaribe.com

3. Product Description

Sofscape Pavers are designed for a wide range of applications that included playground surfacing, walking trails, and recreational areas. The impact attenuation properties of the Sofscape Pavers can reduce the injuries related to a with from playground equipment. Sofscape Pavers are compliant with the Americans With Disabilities Act (A.D.A) requirements and with the guidelines of the Consumer Product Safety Commission (C.P.S.C).

Each rubber pavers is molded in a hexagonal shape, 9-1/8 inches from flat to flat, and 2 inches of thickness. Two Sofscape Pavers cover the area of one square foot.

4. Materials

Sofscape Pavers are manufactured with crumb rubber from disposed tires (SBR, Styrene Butadiene Rubber) and a weather resistant polyurethane polymer resin.

During the molding process the top layer of the Sofscape Pavers is pigmented with one of several color options such as: Black, Green, Gray and Red.

Sofscape Pavers are latex-free.

5. White Speckles on Surface: Recycled Crumb Rubber from post-consumers tires contains up to 15% of white speckles. The white speckles occurs industry-wide on rubber-molded products made from post-consumers tires. The appearance of the white speckles does not affect the safety and accessibility properties of the rubber pavers. The white speckles appear in the course of wear of the surface.

6. Chemical Limitations

Some chemicals can cause damage to the rubber pavers that are constantly exposed to them, such as: gasoline, diesel fuel, acids, and highly concentrated chlorine bleach.

7. Technical Data

Applicable Testing Standards – American Society for Testing Materials (ASTM)

- ASTM F-1951-99**
 Determination of Accessibility of Surface Systems Under and Around Playground Equipment.
 The average work force per Lbf-in values measured lower when propelling the wheelchair over the Sofscape Pavers, than when propelling the wheelchair over a flat surface with a grade of 7.1%.
 The material met the requirements of the ASTM F-1951-99.
 STANDARD SPECIFICATION FOR IMPACT ATTENUATION
 Optimum Drop Height: 4 ft.

<u>Drop Height (at 23°C)</u>	<u>g-Max</u>	<u>HIC</u>
3 ft	128	525
4 ft	156	799
5 ft	189	1205

Note: The G-Max and HIC (Head Impact Criteria) for proper Impact Attenuation of Surface Systems Under and Around Playground Equipment should be below 200 for g-Max and below 1000 for HIC.

- ASTM D395-97**
 COMPRESSION SET TEST
 Average Percentage of Compression Set: 7.65%
- ASTM C67-94**
 COMPRESSIVE STRENGTH
 Average Compressive Strength: 86 psi
- ASTM D2240-86**
 HARDNESS
 Average Hardness (Shore “A” Durometer) 48
- ASTM D2632-88**
 RESILIENCE BY VERTICAL REBOUND
 Average Value: 33

8. Installation

Sofscape Pavers can be installed on existing surfaces such as concrete or asphalt. In addition, Sofscape Pavers can be installed over aggregate material per manufacturers instructions. For a complete installation guideline contact Sofscape Caribe, Inc.

9. Maintenance and Surface Recoating

The following coatings can be used for surface maintenance:

- Pittsburgh Paints 3-510 Series (Urethane Modified)
- Sherwin-Williams Armorseal Tread-Plex SW6094

10. Warranty

Sofscape Pavers are warranted to be free from manufacturing defects for a period of five (5) years from the date of installation. The manufacturer reserves the right to change the design, materials, or specifications to improve the product properties and/or processing at any time without notice.

END OF SECTION